



GE系列接插件技术特性/GE technical characteristics



电流负载能力 / Current carrying capacity

电流负载能力所受的限制主要来自包含接插针的接插体可承受的最大温度。
测试和控制过程依据DINIEC 60512-3。
The current carrying is limited by maximum temperature of materials for inserts and contacts including terminals.
Control and test procedures according to DIN IEC 60512-3.

规范 / Specifications

DIN VDE 0627
DIN VDE 0110

接插件针数/Number of contacts
6,10,16,24,32(2X16),
48(2X24)+PE

插接体 / Inserts



工作电流/Working current (见负载图/See current carrying capacity)	16 A max.
工作电压/Working voltage	500V
测试电压/Test voltage Urms	6KV
污染等级/Pollution degree	3(C)
隔离电阻/Insulation resistance	≥10 ¹⁰ Ω
材料/Material	Polycarbonate
工作温度范围/Temperature range	-40℃...+100℃/125℃
阻燃等级(UL94)Flammability acc.to (UI94)	V0
据UL/CSA工作电压Working voltage acc.to UL/CSA	600V
可拨插次数/Mechanical working life(mating cycles)	≥500

接插针 / Contacts

材料/Material	铜/Copper alloy
表面处理/Surface	镀银/Hard silver-plated 镀金/Hard gold-plated
接触电阻/Contact resistance	≤1m Ω
接线形式/Terminal -mm ² -AWG	螺钉压接/Screw terminal 0.5-4.0mm ² 14
拧紧力矩/测试力矩Tightening/test torque	0.5Nm

金属上壳/底座 Hoods/Housings

材料/Material	铸铝合金/Die cast aluminium
表面处理/Surface	高温粉末镀层 灰色 Powder-coated, RAL 7037
锁定装置/Locking element	不锈钢或铁镀锌 Stainless steel, steel-zinc plated
工作温度范围/Temperature range	-40℃...+125℃
防护等级/Degree of protection acc.to DIN40 050	IP65

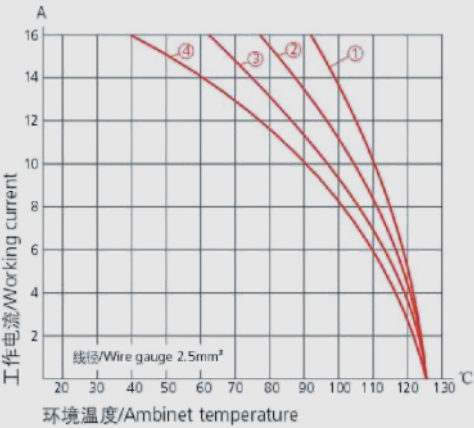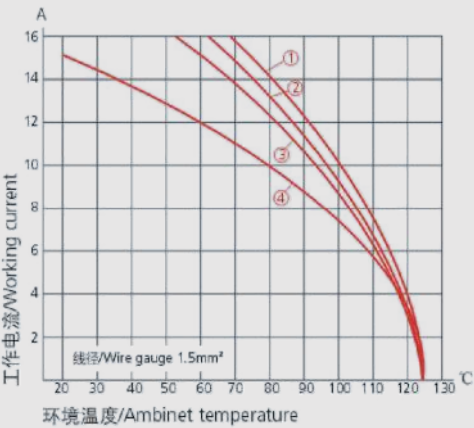

①GDC-GE-006 ②GDC-GE-010
③GDC-GE-016 ④GDC-GE-024

GE-006接插体 / GE-006 inserts



芯件适配G6B外壳

Inserts suit for G6B hoods/housing

6+

螺钉压接/Screw terminal



500V max.16A

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-006-M	
母 Female	GE-006-F	

弹片压接/Spring terminal



500V max.16A

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-006-MS	
母 Female	GE-006-FS	

冷压针压接/Crimp terminal



500V max.16A

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-006-MC	
母 Female	GE-006-FC	



冷压接插针 Crimp contacts

技术参数/Technical data

材料: 铜

Material: copper

接触电阻/Contact resistance: $\leq 1\text{m}\Omega$

接线形式: 冷压工具压接

Terminal: crimp connection



工具 Tools

冷压钳 Manual hydraulic clamp



退针器 Removal tool



(镀银)冷压接插针/Crimp contacts.silver-plated

标识 Identification	线规 Wire gauge	剥线长度 Stripping length	公插针 Male	订货号 Part Number	母插针 Female	订货号 Part Number	内孔 直径
no groove	0.5 mm ²	AWG 20	CEM-0.5		CEF-0.5		1.15
1 groove	0.75 mm ²	AWG 18	CEM-0.75		CEF-0.75		1.3
1 groove	1.0 mm ²	AWG 18	CEM-1.0		CEF-1.0		1.45
2 groove	1.5 mm ²	AWG 16	CEM-1.5		CEF-1.5		1.75
3 groove	2.5 mm ²	AWG 14	CEM-2.5		CEF-2.5		2.25
wide groove	3.0 mm ²	AWG 12	CEM-3.0		CEF-3.0		2.55
no groove	4.0 mm ²	AWG 12	CEM-4.0		CEF-4.0		2.85

(镀金)冷压接插针/Crimp contacts.Gold-plated

标识 Identification	线规 Wire gauge	剥线长度 Stripping length	公插针 Male	订货号 Part Number	母插针 Female	订货号 Part Number	内孔 直径
no groove	0.5 mm ²	AWG 20	DEM-0.5		DEF-0.5		1.15
1 groove	0.75 mm ²	AWG 18	DEM-0.75		DEF-0.75		1.3
1 groove	1.0 mm ²	AWG 18	DEM-1.0		DEF-1.0		1.45
2 groove	1.5 mm ²	AWG 16	DEM-1.5		DEF-1.5		1.75
3 groove	2.5 mm ²	AWG 14	DEM-2.5		DEF-2.5		2.25
wide groove	3.0 mm ²	AWG 12	DEM-3.0		DEF-3.0		2.55
no groove	4.0 mm ²	AWG 12	DEM-4.0		DEF-4.0		2.85

压接线经
Wire gauge
0.5-4mm²

型号/Type

订货号/Part Number

CRIMPBOX-0.5/4

适用类型 For

型号/Type


订货号/Part Number

16A 冷压针
Crimp contacts

REMOV-GEE

1) 接插体之间的最大距离21mm


1) Distance for contact max.21mm



	a	b	e	g	c	d	f	m
M/F	16	32.4	51	34	16.8	34.8	51	34
MS/FS	18	33.5	51	34	18.2	35.4	51	34
MC/FC	18	33.5	51	34	18	35	51	34



接插针排序

Contacts arrangement view from termination side




面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



M



F

G6B带单扣外壳 / G6B with 1 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037


防护等级 Degree of protection : IP65

上壳 / Hoods

侧面进线: Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG13.5	G6B-TS-RO-PG13.5	
PG16	G6B-TS-RO-PG16	
M20	G6B-TS-RO-M20	
M25	G6B-TS-RO-M25	



侧面进线: Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
	高结构/High construction	
PG21	G6B-TSH-RO-PG21	
PG29	G6B-TSH-RO-PG29	
M25	G6B-TSH-RO-M25	
M32	G6B-TSH-RO-M32	

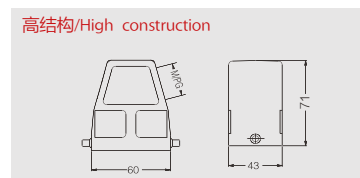

顶部进线: Top entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG13.5	G6B-TG-RO-PG13.5	
PG16	G6B-TG-RO-PG16	
M20	G6B-TG-RO-M20	
M25	G6B-TG-RO-M25	

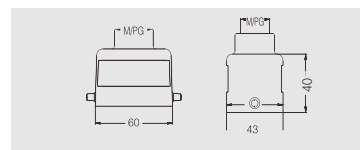

顶部进线: Top entry




螺纹 Thread	型号/Type	订货号 /Part Number
	高结构/High construction	
PG21	G6B-TGH-RO-PG21	
PG29	G6B-TGH-RO-PG29	
M25	G6B-TGH-RO-M25	
M32	G6B-TGH-RO-M32	

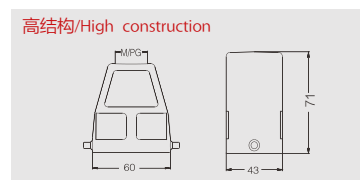上壳侧出线/顶出线
Hoods, side & top entry, high construction

我司可提供顶部、侧面同时出线的非标品
We can provide non-standard products with both top & side entry


型号为: G6B-TSH/TGH-RO-XX/XX
如有需要请与我司联系

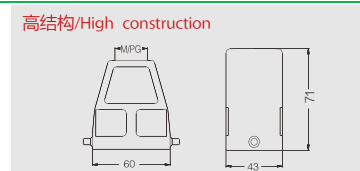

上壳保护盖 Protection covers for hoods




螺纹 Thread	型号/Type	订货号 /Part Number
	G6B-KDT	
	带金属保护盖/With protection cover	
	G6B-KDT-LA	

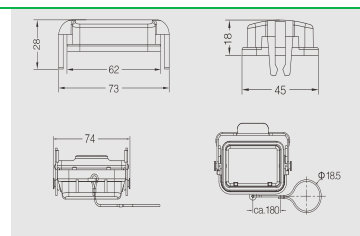

下壳底座 / Housings

外壳底座: 开孔安装
Bulkhead mounted: Bottom entry

螺纹 Thread	型号/Type	订货号 /Part Number
	G6B-AG-LB	
	带保护盖/With protection cover	
	G6B-AD-LB	
	带金属保护盖/With protection cover	
	G6B-AD-LB-LA	

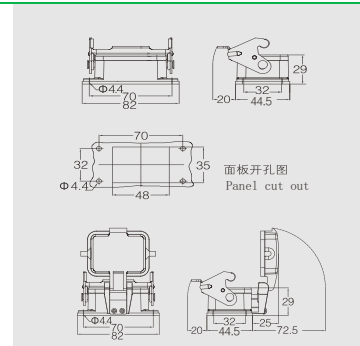

G6B带单扣外壳 / G6B with 1 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390
防护等级 Degree of protection : IP65

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037

下壳底座 / Housings

外壳底座: 表面安装
Surface mounted: Side entry



螺纹 Thread	型号/Type	订货号 /Part Number
1个进线孔1 side entry		
PG13.5	G6B-SGR-LB-PG13.5	
PG16	G6B-SGR-LB-PG16	
M20	G6B-SGR-LB-M20	
M25	G6B-SGR-LB-M25	
2个进线孔2 side entry		
2PG13.5	G6B-SGR-LB-2PG13.5	
2PG16	G6B-SGR-LB-2PG16	
2M20	G6B-SGR-LB-2M20	
2M25	G6B-SGR-LB-2M25	
高结构/High construction		
PG21	G6B-SGRH-LB-PG21	
PG29	G6B-SGRH-LB-PG29	
M32	G6B-SGRH-LB-M32	
2个进线孔2 side entry		
2PG21	G6B-SGRH-LB-2PG21	
2PG29	G6B-SGRH-LB-2PG29	
2M32	G6B-SGRH-LB-2M32	

外壳底座: 表面安装
Surface mounted: Side entry



螺纹 Thread	型号/Type	订货号 /Part Number
带保护盖/With protection cover		
1个进线孔1 side entry		
PG13.5	G6B-SDR-LB-PG13.5	
PG16	G6B-SDR-LB-PG16	
M20	G6B-SDR-LB-M20	
M25	G6B-SDR-LB-M25	
2个进线孔2 side entry		
PG13.5	G6B-SDR-LB-2PG13.5	
PG16	G6B-SDR-LB-2PG16	
M20	G6B-SDR-LB-2M20	
M25	G6B-SDR-LB-2M25	
高结构/High construction		
PG21	G6B-SDRH-LB-PG21	
PG29	G6B-SDRH-LB-PG29	
M32	G6B-SDRH-LB-M32	
2个进线孔2 side entry		
2PG21	G6B-SDRH-LB-2PG21	
2PG29	G6B-SDRH-LB-2PG29	
2M32	G6B-SDRH-LB-2M32	

电缆对接外壳 Cable-to-cable hood




螺纹 Thread	型号/Type	订货号 /Part Number
PG16	G6B-TBF-LB-PG16	
M20	G6B-TBF-LB-M20	
高结构/High construction		
PG16	G6B-TBFH-LB-PG16	
PG29	G6B-TBFH-LB-PG29	
M25	G6B-TBFH-LB-M25	
M32	G6B-TBFH-LB-M32	


底座保护盖 Housing protection cover






螺纹 Thread	型号/Type	订货号 /Part Number
	G6B-KDB	
金属盖/用于上壳 For hoods		
	G6B-KDB-LA-1	
金属盖/用于下壳 For housings		
	G6B-KDB-LA-2	



高结构/High construction



高结构/High construction

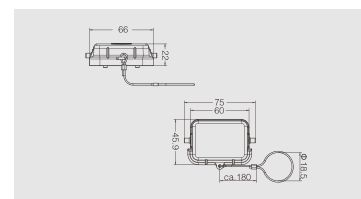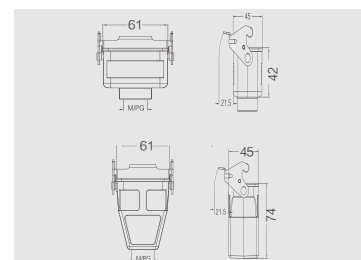

G6B耐腐蚀单扣外壳 /G6B with 1lever on the hoods/housings

底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 9005 / Powder-coated, RAL 9005


防护等级 Degree of protection : IP65

上壳 / Hoods

侧面进线 Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG13.5	G6B-TS-RO-M- PG13.5	
PG16	G6B-TS-RO-M-PG16	
M20	G6B-TS-RO-M-M20	

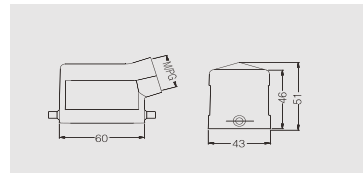

侧面进线 Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
	高结构/High construction	
M25	G6B-TSH-RO-M-M25	
M32	G6B-TSH-RO-M-M32	

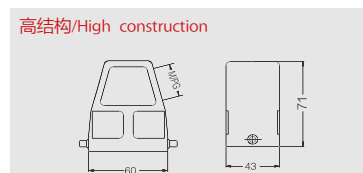

顶部进线 Top entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG13.5	G6B-TG-RO-M-PG13.5	
PG16	G6B-TG-RO-M-PG16	
M20	G6B-TG-RO-M-M20	

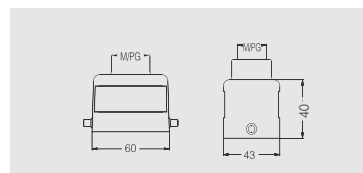

顶部进线 Top entry



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G6B-TGH-RO-M-PG21	
PG29	G6B-TGH-RO-M-PG29	
M25	G6B-TGH-RO-M-M25	
M32	G6B-TGH-RO-M-M32	

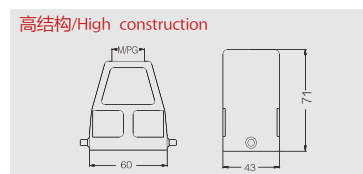


下壳底座 / Housings

外壳底座: 开孔安装 Bulkhead mounted housing




螺纹 Thread	型号/Type	订货号 /Part Number
	G6B-AG-LB-M	
	带保护盖/With protection cover	
	G6B-AD-LB-M	
	带金属保护盖With protection cover	
	G6B-AD-LB-AL-M	

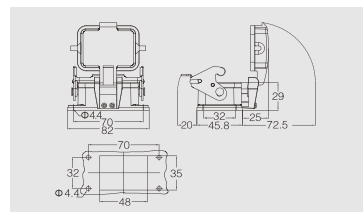

外壳底座: 表面安装 Surface mounted: Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
	2个进线孔2 side entry	
2PG16	G6B-SGR-LB-M-2PG16	
2M20	G6B-SGR-LB-M-2M20	

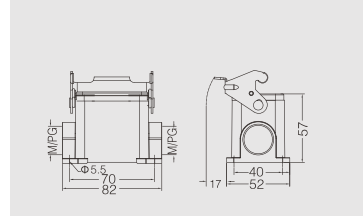

电缆对接外壳 Cable-to-cable hood




螺纹 Thread	型号/Type	订货号 /Part Number
PG13.5	G6B-TBF-LB-M-PG16	

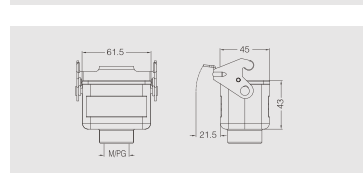

底座保护盖 Housing protection cover



螺纹 Thread	型号/Type	订货号 /Part Number
	金属保护盖With protection cover	
	G6B-KDT-AL-M	

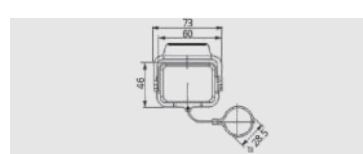

GE-010接插体 /GE-010 inserts



芯件适配用G10B外壳

inserts suit for G10B hoods/housing

10+

螺钉压接/Screw terminal



500V max.16A

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-010-M	
母 Female	GE-010-F	

弹片压接/Spring terminal



500V max.16A

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-010-MS	
母 Female	GE-010-FS	

冷压针压接/Crimp terminal



500V max.16A

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-010-MC	
母 Female	GE-010-FC	



冷压接插针 Crimp contacts

技术参数/Technical data

材料: 铜

Material: copper

接触电阻/Contact resistance: $\leq 1\text{m}\Omega$

接线形式: 冷压工具压接

Terminal: crimp connection



工具 Tools

冷压钳 Manual hydraulic clamp



退针器 Removal tool



(镀银)冷压接插针/Crimp contacts.silver-platea

标识 Identification	线规 Wire gauge	剥线长度 Stripping length	公插针 Male	订货号 Part Number	母插针 Female	订货号 Part Number	内孔 直径
no groove	0.5 mm ²	AWG 20	7.5m m	CEM-0.5	CEF-0.5		1.15
1 groove	0.75 mm ²	AWG 18	7.5m m	CEM-0.75	CEF-0.75		1.3
1 groove	1.0 mm ²	AWG 18	7.5m m	CEM-1.0	CEF-1.0		1.45
2 groove	1.5 mm ²	AWG 16	7.5m m	CEM-1.5	CEF-1.5		1.75
3 groove	2.5 mm ²	AWG 14	7.5m m	CEM-2.5	CEF-2.5		2.25
wide groove	3.0 mm ²	AWG 12	7.5m m	CEM-3.0	CEF-3.0		2.55
no groove	4.0 mm ²	AWG 12	7.5m m	CEM-4.0	CEF-4.0		2.85

(镀金)冷压接插针/Crimp contacts.Gold-plated

标识 Identification	线规 Wire gauge	剥线长度 Stripping length	公插针 Male	订货号 Part Number	母插针 Female	订货号 Part Number	内孔 直径
no groove	0.5 mm ²	AWG 20	7.5m m	DEM-0.5	DEF-0.5		1.15
1 groove	0.75 mm ²	AWG 18	7.5m m	DEM-0.75	DEF-0.75		1.3
1 groove	1.0 mm ²	AWG 18	7.5m m	DEM-1.0	DEF-1.0		1.45
2 groove	1.5 mm ²	AWG 16	7.5m m	DEM-1.5	DEF-1.5		1.75
3 groove	2.5 mm ²	AWG 14	7.5m m	DEM-2.5	DEF-2.5		2.25
wide groove	3.0 mm ²	AWG 12	7.5m m	DEM-3.0	DEF-3.0		2.55
no groove	4.0 mm ²	AWG 12	7.5m m	DEM-4.0	DEF-4.0		2.85

压接线径

Wire gauge
0.5-4mm²

型号/Type

CRIMPBOX-0.5/4

订货号/Part Number

适用类型 For

16A 冷压针
Crimp contacts


型号/Type

REMOV-GEE

订货号/Part Number

1) 接插体之间的最大距离21mm


1) Distance for contact max.21mm



	a	b	e	g	c	d	f	m
M/F	16.5	32.5	64.5	34	16.8	34.8	64.5	34
MS/FS	18.5	33.5	64	34	18.5	35.6	64.5	34
MZ/FZ	17.4	34.5	64	33.8	17.2	36.8	64.5	34



接插针排序

Contacts arrangement view from termination side




面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



M



F

G10B带双扣外壳 / G10B with 2 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037


防护等级 Degree of protection : IP65

上壳 / Hoods

侧面进线 Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG16	G10B-TS-PG16	
M20	G10B-TS-M20	
M25	G10B-TS-M25	
高结构/High construction		
PG21	G10B-TSH-PG21	
PG29	G10B-TSH-PG29	
M25	G10B-TSH-M25	
M32	G10B-TSH-M32	

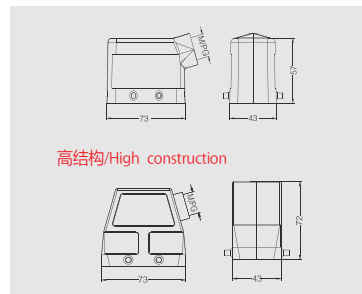

顶部进线 Top entry



螺纹 Thread	型号/Type	订货号 /Part Number
PG16	G10B-TG-PG16	
M20	G10B-TG-M20	
M25	G10B-TG-M25	
高结构/High construction		
PG21	G10B-TGH-PG21	
PG29	G10B-TGH-PG29	
M25	G10B-TG H-M25	
M32	G10B-TGH-M32	

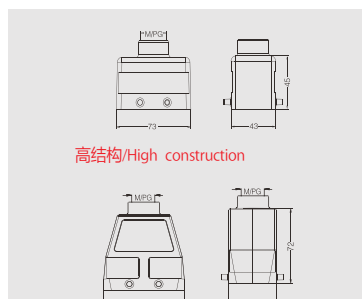


上壳侧出线/顶出线 Hoods, side&top entry, high construction



我司可提供顶部、侧面同时出线的非标品
We can provide non-standard products with both top&side entry


型号为:G10-TSH/TGH-PG/M 如有需要请与我司联系

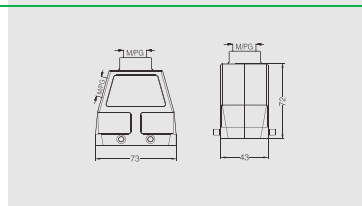

上壳保护盖 Protection covers for hoods



螺纹 Thread	型号/Type	订货号 /Part Number
	G10B-KDT	
带金属保护盖 /With protection cover		
金属盖/用于上壳 For hoods		
	G10B-KD T-LA-1	
金属盖/用于下壳 For housings		
	G10B-KD T-LA-2	

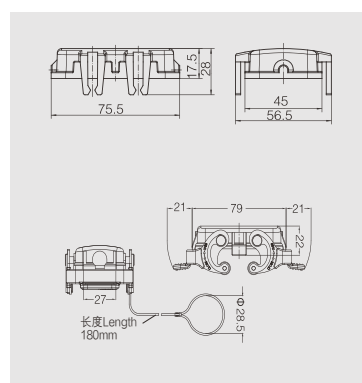


下壳底座 / Housings

外壳底座: 开孔安装 Bulkhead mounted



螺纹 Thread	型号/Type	订货号 /Part Number
	G10B-AG	

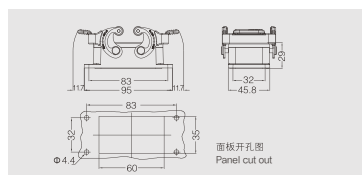

G10B帶双扣外壳 / G10B with 2 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037


防护等级 Degree of protection : IP65

下壳底座 / Housings

外壳底座: 表面安装
Surface mounted: Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
1个进线孔 1 side entry		
PG16	G10B-SGR-PG16	
M20	G10B-SGR-M20	
M25	G10B-SGR-M25	
2个进线孔 2 side entry		
PG16	G10B-SGR-2PG16	
M20	G10B-SGR-2M20	
M25	G10B-SGR-2M25	
高结构/High construction		
1个进线孔 1 side entry		
PG21	G10B-SGRH-PG21	
PG29	G10B-SGRH-PG29	
M32	G10B-SGRH-M32	
2个进线孔 2 side entry		
PG21	G10B-SGRH-2PG21	
PG29	G10B-SGRH-2PG29	
M32	G10B-SGRH-2M32	

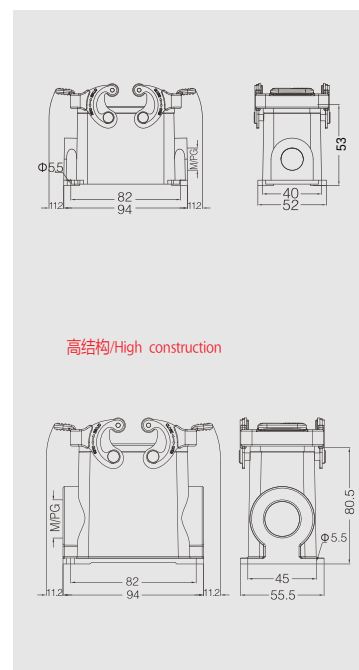

电缆对接下壳 Cable-to-cable hood




螺纹 Thread	型号/Type	订货号 /Part Number
PG16	G10B-TBF-PG16	
M20	G10B-TBF-M20	
M25	G10B-TBF-M25	
高结构/high construction		
PG21	G10B-TBFH-PG21	
PG29	G10B-TBFH-PG29	
M25	G10B-TBFH-M25	
M32	G10B-TBFH-M32	

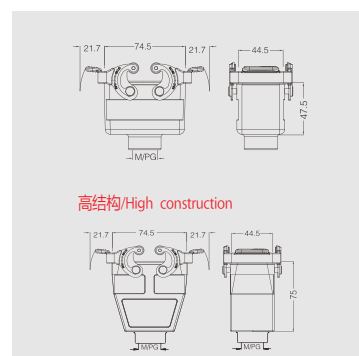

底座保护盖
Housing protection cover



螺纹 Thread	型号/Type	订货号 /Part Number
	G10B-KDB	
	带金属保护盖 /With protection cover	
---	金属盖/用于上壳 For hoods	
	G10B-KDB-LA-1	
	金属盖/用于下壳 For housings	
	G10B-KDB-LA-2	

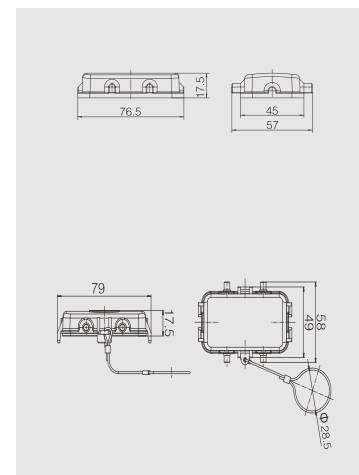

G10B带双扣外壳 / G10B with 2 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037

防护等级 Degree of protection : IP65


上壳 / Hoods

侧出带双扣上壳

Side entry housing with two levers




螺纹 Thread	型号/Type	订货号 /Part Number
PG16	G10B-TSB-PG16	
M20	G10B-TSB-M20	
M25	G10B-TSB-M25	
高结构/High construction		
PG21	G10B-TSBH-PG21	
PG29	G10B-TSBH-PG29	
M25	G10B-TSBH-M25	
M32	G10B-TSBH-M32	

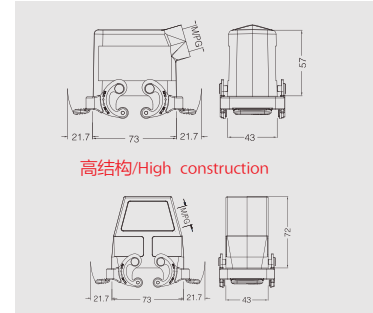

顶出带双扣上壳 Top entry housing with two levers



螺纹 Thread	型号/Type	订货号 /Part Number
PG16	G10B-TGB-PG16	
M20	G10B-TGB-M20	
M25	G10B-TGB-M25	
高结构/High construction		
PG21	G10B-TGBH-PG21	
PG29	G10B-TGBH-PG29	
M25	G10B-TGBH-M25	
M32	G10B-TGBH-M32	

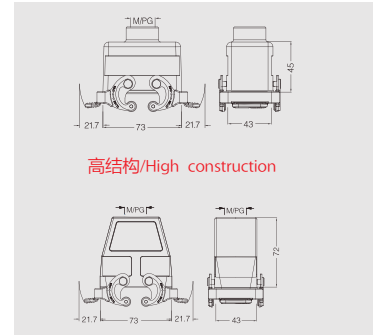


下壳底座 / Housings

带盖开孔底座 Bulkhead mounting



螺纹 Thread	型号/Type	订货号 /Part Number
	G10B-AG-BO	
	带保护盖/with protection cover	
	G10B-AD-BO	

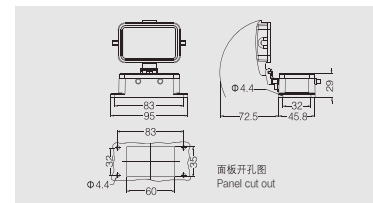


下壳底座 / Housings

带盖表面安装底座 Surface mounting



螺纹 Thread	型号/Type	订货号 /Part Number
	带保护盖/with protection cover	
1个进线孔 1 side entry		
PG16	G10B-SDR-BO-PG16	
M20	G10B-SDR-BO-M20	
M25	G10B-SDR-BO-M25	
2个进线孔 2 side entry		
PG16	G10B-SDR-BO-2PG16	
M20	G10B-SDR-BO-2M20	
M25	G10B-SDR-BO-2M25	
高结构/High construction		
1个进线孔 1 side entry		
PG21	G10B-SDRH-BO-PG21	
PG29	G10B-SDRH-BO-PG29	
M32	G10B-SDRH-BO-M32	
2个进线孔 2 side entry		
PG21	G10B-SDRH-BO-2PG21	
PG29	G10B-SDRH-BO-2PG29	
M32	G10B-SDRH-BO-2M32	

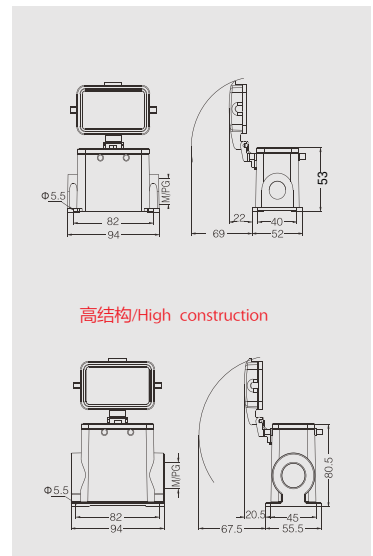

G10B带单扣外壳 / G10B with 1 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037

防护等级 Degree of protection : IP65

上壳 / Hoods


侧面进线 Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG16	G10B-TS-RO-PG16	
M20	G10B-TS-RO-M20	
M25	G10B-TS-RO-M25	



高结构/High construction		
PG21	G10B-TSH-RO-PG21	
PG29	G10B-TSH-RO-PG29	
M25	G10B-TSH-RO-M25	
M32	G10B-TSH-RO-M32	



高结构/High construction




顶部进线 Top entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG16	G10B-TG-RO-PG16	
M20	G10B-TG-RO-M20	
M25	G10B-TG-RO-M25	



高结构/High construction		
PG21	G10B-TGH-RO-PG21	
PG29	G10B-TGH-RO-PG29	
M25	G10B-TGH-RO-M25	
M32	G10B-TGH-RO-M32	



高结构/High construction




下壳底座 / Housings


外壳底座: 开孔安装 Bulkhead mounted




螺纹 Thread	型号/Type	订货号 /Part Number
	G10B-AG-LB	
带保护盖/with protection cover		
	G10B-AD-LB	
上壳保护盖/protection cover		
	G10B-KDT-LB	

外壳底座: 表面安装
Surface mounted: Side entry

螺纹 Thread	型号/Type	订货号 /Part Number
1个进线孔1 side entry		
PG16	G10B-SGR-LB-PG16	
M20	G10B-SGR-LB-M20	
M25	G10B-SGR-LB-M25	
2个进线孔2 side entry		
PG16	G10B-SGR-LB-2PG16	
M20	G10B-SGR-LB-2M20	
M25	G10B-SGR-LB-2M25	
高结构 / High construction		
1个进线孔1 side entry		
PG21	G10B-SGRH-LB-PG21	
PG29	G10B-SGRH-LB-PG29	
M32	G10B-SGRH-LB-M32	
2个进线孔2 side entry		
PG21	G10B-SGRH-LB-2PG21	
PG29	G10B-SGRH-LB-2PG29	
M32	G10B-SGRH-LB-2M32	



高结构 / High construction



G10B带单扣外壳 / G10B with 1 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037

防护等级 Degree of protection : IP65

下壳底座 / Housings

带保护盖表面安装


Surface mounted with protection cover




电缆对接下壳 Cable-to-cable hood



螺纹 Thread	型号/Type	订货号 /Part Number
带保护盖 /ith protection cover		
1个进线孔1 side entry		
PG16	G10B-SDR-LB-PG16	
M20	G10B-SDR-LB-M20	
M25	G10B-SDR-LB-M25	
2个进线孔2 side entry		
PG16	G10B-SDR-LB-2PG16	
M20	G10B-SDR-LB-2M20	
M25	G10B-SDR-LB-2M25	
高结构 / High construction		
1个进线孔1 side entry		
PG21	G10B-SDRH-LB-PG21	
PG29	G10B-SDRH-LB-PG29	
M32	G10B-SDRH-LB-M32	
2个进线孔2 side entry		
PG21	G10B-SDRH-LB-2PG21	
PG29	G10B-SDRH-LB-2PG29	
M32	G10B-SDRH-LB-2M32	

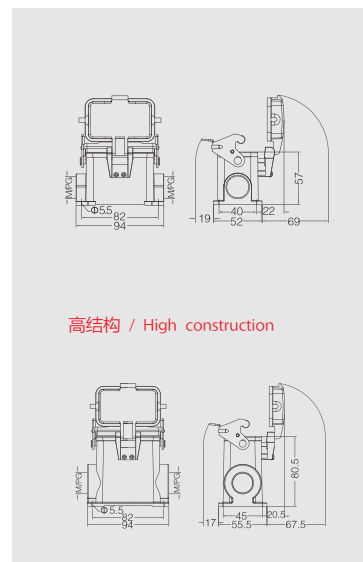

螺纹 Thread	型号/Type	订货号 /Part Number
PG16	G10B-TBF-LB-PG16	
M20	G10B-TBF-LB-M20	
M25	G10B-TBF-LB-M25	
高结构 / High construction		
PG21	G10B-TBFH-LB-PG21	
PG29	G10B-TBFH-LB-PG29	
M25	G10B-TBFH-LB-M25	
M32	G10B-TBFH-LB-M32	

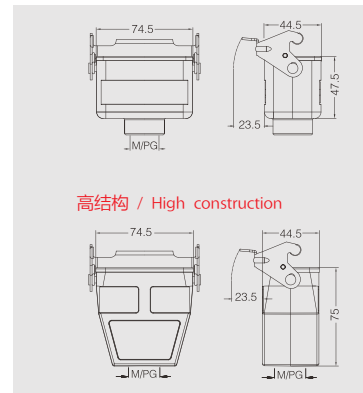

G10B 耐腐蚀外壳 Metal Hoods & Housings For higher environmental requirements



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 9005 / Powder-coated, RAL 9005


防护等级 Degree of protection : IP65

上壳 / Hoods


侧面进线 Side entry



螺纹 Thread	型号/Type	订货号 /Part Number
M20	G10B-TS-M-M20	
PG16	G10B-TS-M-PG16	

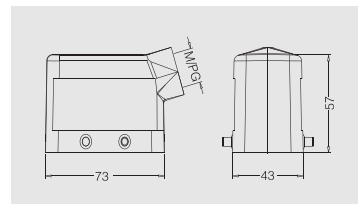侧出线高结构
side entry, high construction


螺纹 Thread	型号/Type	订货号 /Part Number
M25	G10B-TSH-M-M25	

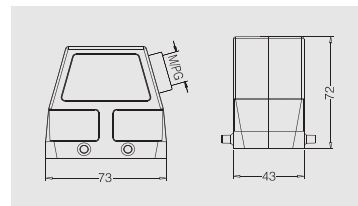


顶部进线 Top entry



螺纹 Thread	型号/Type	订货号 /Part Number
M20	G10B-TG-M-M20	
PG16	G10B-TG-M-PG16	

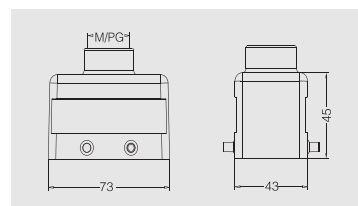顶出线高结构
top entry, high construction

螺纹 Thread	型号/Type	订货号 /Part Number
M32	G10B-TGH-M-M32	

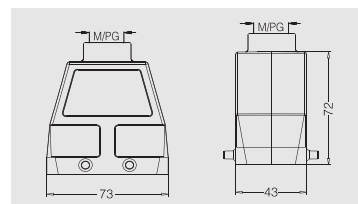


下壳底座 / Housings

电缆对接下壳 Cable-to-cable hood




螺纹 Thread	型号/Type	订货号 /Part Number
PG16	G10B-TBF-M-PG16	

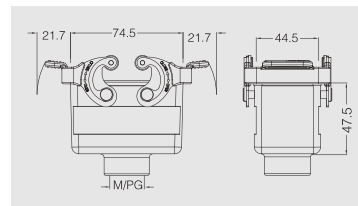

外壳底座: 开孔安装 Bulkhead mounted



螺纹 Thread	型号/Type	订货号 /Part Number
---	G10B-AG-M	

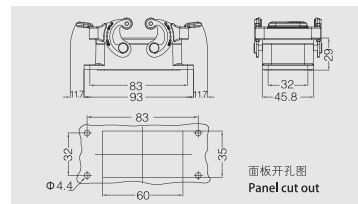

G10B 耐腐蚀外壳 Metal Hoods & Housings For higher environmental requirements



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 9005 / Powder-coated, RAL 9005


防护等级 Degree of protection : IP65

下壳底座 / Housings

外壳底座: 表面安装 Surface mounted: Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG16	G10B-SGR-M-PG16	
M20	G10B-SGR-M-M20	

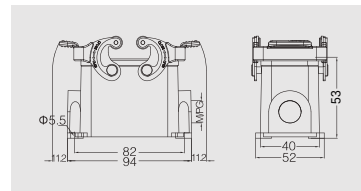

外壳底座: 表面安装
Surface mounted: Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
M32	G10B-SGRH-M-M32	

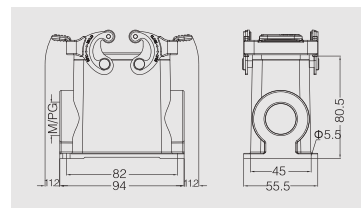

上壳保护盖 Protection covers for hoods




螺纹 Thread	型号/Type	订货号 /Part Number
	金属盖/用于上壳 For hoods	
	G10B-KDT-LA-M-1	
	金属盖/用于下壳 For housings	
	G10B-KDT-LA-M-2	

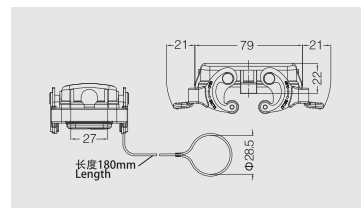

底座保护盖 Housing protection cover



螺纹 Thread	型号/Type	订货号 /Part Number
	金属盖/用于上壳 For hoods	
	G10B-KDB-LA-M-1	
	金属盖/用于下壳 For housings	
	G10B-KDB-LA-M-2	

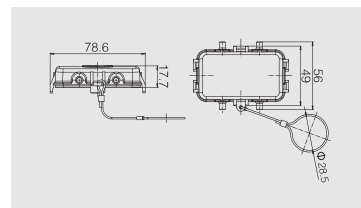


上壳 / Hoods

防护等级 Degree of protection : IP65 单扣

顶部进线 Top entry



螺纹 Thread	型号/Type	订货号 /Part Number
M32	G10B-TGH-RO-M-M32	

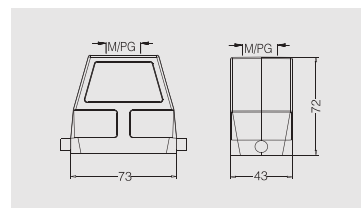


下壳底座 / Housings

外壳底座: 表面安装
Surface mounted: Side entry



螺纹 Thread	型号/Type	订货号 /Part Number
M25	G10B-SGRH-LB-M-M25	

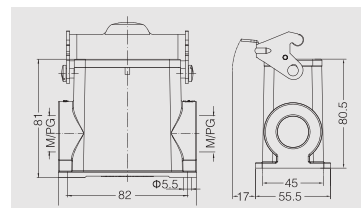

GE-016接插体 / GE-016 inserts



芯件适配用G16B外壳

Inserts suit for G16B hoods/housing

16+

螺钉压接/Screw terminal



500V max.16A

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-016-M	
母 Female	GE-016-F	


弹片压接/Spring terminal



500V max.16A

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-016-MS	
母 Female	GE-016-FS	

冷压针压接/Crimp terminal



500V max.16A

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-016-MC	
母 Female	GE-016-FC	



冷压接插针 Crimp contacts

技术参数/Technical data

材料: 铜

Material: copper

接触电阻/Contact resistance: $\leq 1\text{m}\Omega$

接线形式: 冷压工具压接

Terminal: crimp connection



工具 Tools

冷压钳 Manual hydraulic clamp



退针器 Removal tool



(镀银)冷压接插针/Crimp contacts.silver-platea


标识 Identification	线规 Wire gauge	剥线长度 Stripping length	公插针 Male	母插针 Female	订货号 Part Number	内孔直径
no groove	0.5 mm ²	AWG 20	7.5m m	CEM-0.5	CEF-0.5	1.15
1 groove	0.75 mm ²	AWG 18	7.5m m	CEM-0.75	CEF-0.75	1.3
1 groove	1.0 mm ²	AWG 18	7.5m m	CEM-1.0	CEF-1.0	1.45
2 groove	1.5 mm ²	AWG 16	7.5m m	CEM-1.5	CEF-1.5	1.75
3 groove	2.5 mm ²	AWG 14	7.5m m	CEM-2.5	CEF-2.5	2.25
wide groove	3.0 mm ²	AWG 12	7.5m m	CEM-3.0	CEF-3.0	2.55
no groove	4.0 mm ²	AWG 12	7.5m m	CEM-4.0	CEF-4.0	2.85

(镀金)冷压接插针/Crimp contacts.Gold-plated

标识 Identification	线规 Wire gauge	剥线长度 Stripping length	公插针 Male	母插针 Female	订货号 Part Number	内孔直径
no groove	0.5 mm ²	AWG 20	7.5m m	DEM-0.5	DEF-0.5	1.15
1 groove	0.75 mm ²	AWG 18	7.5m m	DEM-0.75	DEF-0.75	1.3
1 groove	1.0 mm ²	AWG 18	7.5m m	DEM-1.0	DEF-1.0	1.45
2 groove	1.5 mm ²	AWG 16	7.5m m	DEM-1.5	DEF-1.5	1.75
3 groove	2.5 mm ²	AWG 14	7.5m m	DEM-2.5	DEF-2.5	2.25
wide groove	3.0 mm ²	AWG 12	7.5m m	DEM-3.0	DEF-3.0	2.55
no groove	4.0 mm ²	AWG 12	7.5m m	DEM-4.0	DEF-4.0	2.85

1) 接插体之间的最大距离21mm


1) Distance for contact max.21mm



	a	b	e	g	c	d	f	m
M/F	17	32.5	84.2	34	17	34.8	84.5	34
MS/FS	18	33.7	84.6	34	18.2	35.8	84.5	34
MZ/FZ	17.4	34.5	84.5	34	17.2	36.8	84.5	34



接插针排序

Contacts arrangement view from termination side




面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



M



F

压接线经

Wire gauge
0.5-4mm²

型号/Type

CRIMPBOX-0.5/4

订货号/Part Number

适用类型 For

16A 冷压针
Crimp contacts

型号/Type

REMOV-GEE

订货号/Part Number

G16B 双扣外壳 /G16B with 2 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037

防护等级 Degree of protection : IP65

上壳 / Hoods


侧面进线 Side entry



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G16B-TS-PG21	
M25	G16B-TS-M25	
M32	G16B-TS-M32	

高结构/High construction

PG21	G16B-TSH-PG21	
PG29	G16B-TSH-PG29	
M25	G16B-TSH-M25	
M32	G16B-TSH-M32	
M40	G16B-TSH-M40	

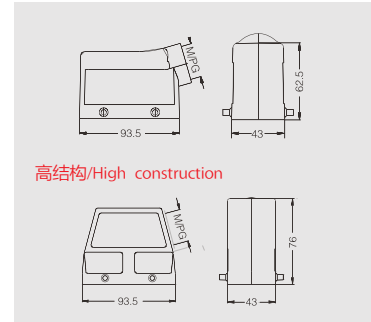


顶部进线 Top entry



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G16B-TG-PG21	
M25	G16B-TG-M25	
M32	G16B-TG-M32	


高结构/High construction

PG21	G16B-TGH-PG21	
PG29	G16B-TGH-PG29	
M25	G16B-TGH-M25	
M32	G16B-TGH-M32	
M40	G16B-TGH-M40	
2个进线孔 2 side entry		
PG16	G16B-TGH-2PG16	
PG21	G16B-TGH-2PG21	
M25	G16B-TGH-2M25	

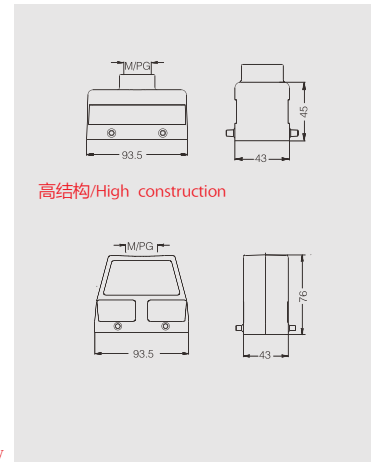上壳侧出线/顶出线
Hoods, side & top entry, high construction

我司可提供顶部、侧面同时出线的非标品
We can provide non-standard products with both top & side entry


型号为: G16B-TSH/TGH-PG/M 如有需要请与我司联系

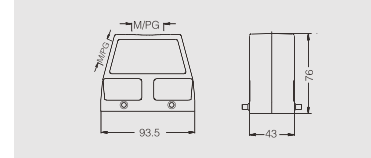

上壳保护盖 Protection covers for hoods




螺纹 Thread	型号/Type	订货号 /Part Number
	G16B-KDT	
带金属保护盖/With protection cover		
金属盖/用于上壳 For hoods		
	G16B-KD T-LA-1	
金属盖/用于下壳 For housings		
	G16B-KD T-LA-2	

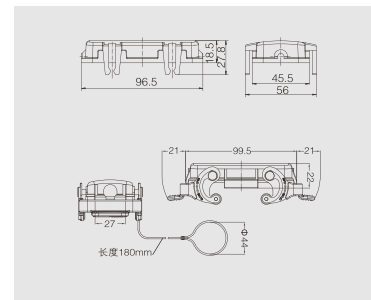

下壳底座 / Housings

外壳底座: 开孔安装
Bulkhead mounted

螺纹 Thread	型号/Type	订货号 /Part Number
	G16B-AG	

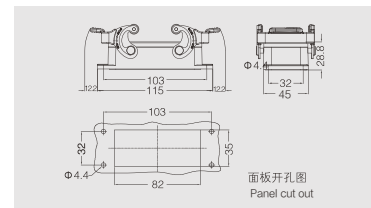

G16B 双扣外壳 /G16B with 2 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390


表面粉末镀层, RAL 7037 / Powder-coated,RAL 7037

防护等级 Degree of protection : IP65


下壳底座 / Housings

外壳底座: 表面安装
Surface mounted: Side entry

螺纹 Thread	型号/Type	订货号 /Part Number
1个进线孔 1 side entry		
PG21	G16B-SGR-PG21	
M25	G16B-SGR-M25	
2个进线孔 2 side entry		
PG21	G16B-SGR-2PG21	
M25	G16B-SGR-2M25	
高结构/High construction		
PG29	G16B-SGRH-PG29	
M32	G16B-SGRH-M32	
M40	G16B-SGRH-M40	
2个进线孔 2 side entry		
PG29	G16B-SGRH-2PG29	
M32	G16B-SGRH-2M32	
M40	G16B-SGRH-2M40	




高结构/High construction




电缆对接下壳 Cable-to-cable hood



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G16B-TBF-PG21	
M25	G16B-TBF-M25	
M32	G16B-TBF-M32	
高结构/High construction		
PG21	G16B-TBFH-PG21	
PG29	G16B-TBFH-PG29	
M25	G16B-TBFH-M25	
M32	G16B-TBFH-M32	




高结构/High construction



底座保护盖 Housing protection cover



螺纹 Thread	型号/Type	订货号 /Part Number
	G16B-KDB	
金属保护盖 /With protection cover		
金属盖/用于上壳 For hoods		
	G16B-KDB-LA-1	
金属盖/用于下壳 For housings		
	G16B-KDB-LA-2	



G16B 双扣外壳 /G16B with 2 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated,RAL 7037

防护等级 Degree of protection : IP65


上壳 / Hoods

侧出带双扣下壳

Side entry housing with two levers



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G16B-TSB-PG21	
M25	G16B-TSB-M25	
M32	G16B-TSB-M32	
高结构/High construction		
PG21	G16B-TSBH-PG21	
PG29	G16B-TSBH-PG29	
M25	G16B-TSBH-M25	
M32	G16B-TSBH-M32	

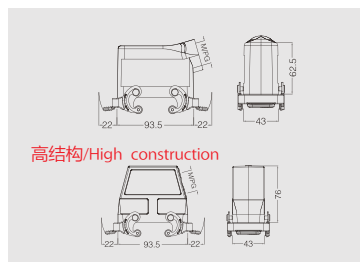


顶出带双扣下壳

Top entry housing with two levers



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G16B-TGB-PG21	
M25	G16B-TGB-M25	
M32	G16B-TGB-M32	
高结构/High construction		
PG21	G16B-TGBH-PG21	
PG29	G16B-TGBH-PG29	
M25	G16B-TGBH-M25	
M32	G16B-TGBH-M32	

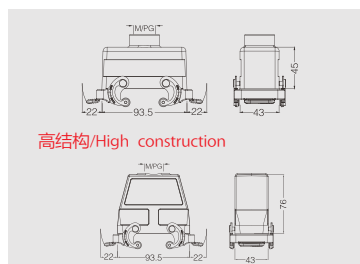


双扣带盖开孔底座

Bulkhead mounting with hoods



螺纹 Thread	型号/Type	订货号 /Part Number
	G16B-AG-BO	
带保护盖/with protection cover		
	G16B-AD-BO	
带金属保护盖/with protection cover		
	G16B-AD-AL-BO	

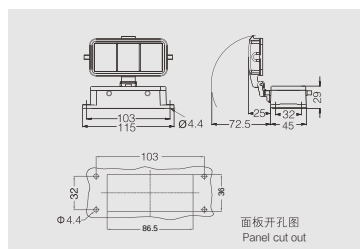


下壳底座 / Housings

双扣带盖表面安装底座

Surface mounting with hoods



螺纹 Thread	型号/Type	订货号 /Part Number
1个进线孔 1 side entry		
PG21	G16B-SDR-BO-PG21	
M25	G16B-SDR-BO-M25	
2个进线孔 2 side entry		
PG21	G16B-SDR-BO-2PG21	
M25	G16B-SDR-BO-2M25	
高结构/High construction		
1个进线孔 1 side entry		
PG21	G16B-SDRH-BO-PG21	
PG29	G16B-SDRH-BO-PG29	
M32	G16B-SDRH-BO-M32	
2个进线孔 2 side entry		
PG21	G16B-SDRH-BO-2PG21	
PG29	G16B-SDRH-BO-2PG29	
M32	G16B-SDRH-BO-2M32	

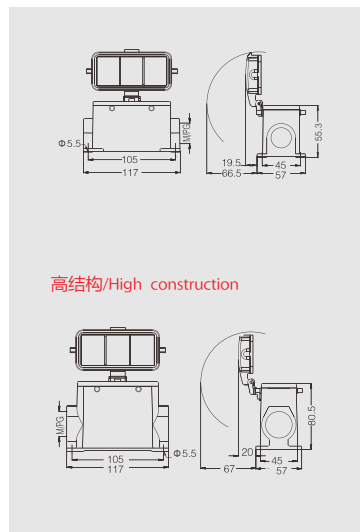

G16B单扣外壳 /G16B with 1 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037

防护等级 Degree of protection : IP65

上壳 / Hoods

侧面进线 Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G16B-TS-RO-PG21	
M25	G16B-TS-RO-M25	
M32	G16B-TS-RO-M32	



高结构/High construction		
PG21	G16B-TSH-RO-PG21	
PG29	G16B-TSH-RO-PG29	
M25	G16B-TSH-RO-M25	
M32	G16B-TSH-RO-M32	
M40	G16B-TSH-RO-M40	


高结构/High construction



顶部进线 Top entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G16B-TG-RO-PG21	
M25	G16B-TG-RO-M25	
M32	G16B-TG-RO-M32	



高结构/High construction		
PG21	G16B-TGH-RO-PG21	
PG29	G16B-TGH-RO-PG29	
M25	G16B-TGH-RO-M25	
M32	G16B-TGH-RO-M32	
M40	G16B-TGH-RO-M40	

高结构/High construction




下壳底座 / Housings

外壳底座: 开孔安装 Bulkhead mounted



螺纹 Thread	型号/Type	订货号 /Part Number
	G16B-AG-LB	
	带保护盖/ith protection cover	
	G16B-AD-LB	
	上壳保护盖/protection cover	
	G16B-KDT-LB	



G16B单扣外壳 /G16B with 1 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390


表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037

防护等级 Degree of protection : IP65

下壳底座 / Housings

外壳底座: 表面安装
Surface mounted: Side entry

螺纹 Thread	型号/Type	订货号 /Part Number
1个进线孔1 side entry		
PG21	G16B-SGR-LB-PG21	
M25	G16B-SGR-LB-M25	
2个进线孔2 side entry		
2PG21	G16B-SGR-LB-2PG21	
2M25	G16B-SGR-LB-2M25	
高结构 / High construction		
1个进线孔1 side entry		
PG21	G16B-SGRH-LB-PG21	
PG29	G16B-SGRH-LB-PG29	
M32	G16B-SGRH-LB-M32	
2个进线孔2 side entry		
PG21	G16B-SGRH-LB-2PG21	
PG29	G16B-SGRH-LB-2PG29	
M32	G16B-SGRH-LB-2M32	

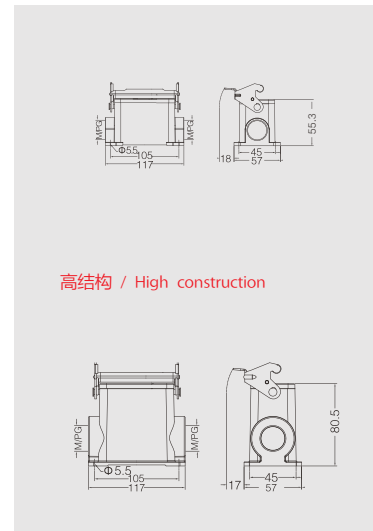


下壳底座 / Housings

带盖表面安装底座 Surface mounting




螺纹 Thread	型号/Type	订货号 /Part Number
1个进线孔1 side entry		
PG21	G16B-SDR-LB-PG21	
M25	G16B-SDR-LB-M25	
2个进线孔2 side entry		
2PG21	G16B-SDR-LB-2PG21	
2M25	G16B-SDR-LB-2M25	
高结构 / High construction		
1个进线孔1 side entry		
PG21	G16B-SDRH-LB-PG21	
PG29	G16B-SDRH-LB-PG29	
M32	G16B-SDRH-LB-M32	
2个进线孔2 side entry		
PG21	G16B-SDRH-LB-2PG21	
PG29	G16B-SDRH-LB-2PG29	
M32	G16B-SDRH-LB-2M32	

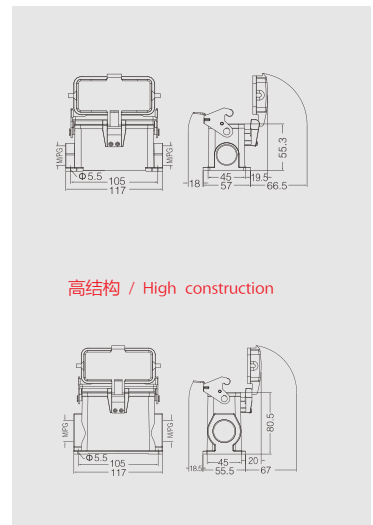

电缆对接下壳 Cable-to-cable hood



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G16B-TBF-LB-PG21	
M25	G16B-TBF-LB-M25	
M32	G16B-TBF-LB-M32	
高结构 / High construction		
PG21	G16B-TBFH-LB-PG21	
PG29	G16B-TBFH-LB-PG29	
M32	G16B-TBFH-LB-M32	
M40	G16B-TBFH-LB-M40	

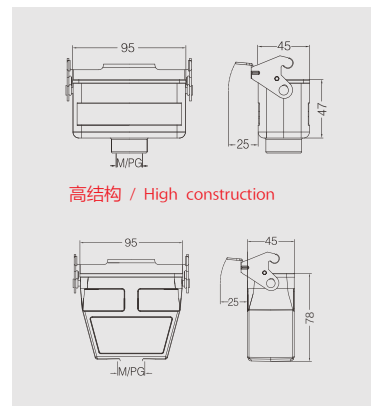

G16B 耐腐蚀外壳 Metal Hoods & Housings For higher environmental requirements



底部外壳安装开孔尺寸/Housing mounting dimensionsPAGE/390

表面粉末镀层, RAL 9005 / Powder-coated,RAL 9005


防护等级 Degree of protection : IP65

上壳 / Hoods


侧面进线 Side entry



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G16B-TS-M-PG21	
M25	G16B-TS-M-M25	

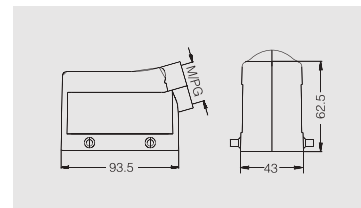侧出线高结构
side entry,high construction


螺纹 Thread	型号/Type	订货号 /Part Number
PG29	G16B-TSH-M-PG29	
M32	G16B-TSH-M-M32	
M40	G16B-TSH-M-M40	

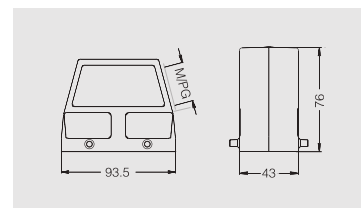


顶部进线 Top entry



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G16B-TG-M-PG21	
M25	G16B-TG-M-M25	

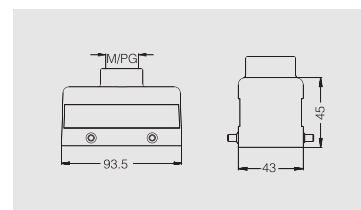顶出线高结构
top entry,high construction


螺纹 Thread	型号/Type	订货号 /Part Number
PG29	G16B-TGH-M-PG29	
M32	G16B-TGH-M-M32	

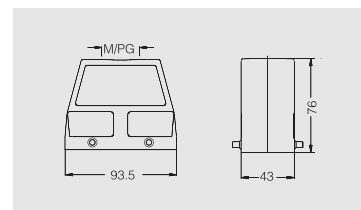


下壳底座 / Housings

外壳底座:开孔安装
Bulkhead mounted

螺纹 Thread	型号/Type	订货号 /Part Number
---	G16B-AG-M	

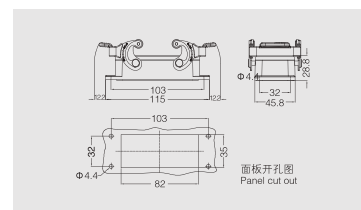外壳底座: 表面安装
Surface mounted: Side entry

螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G16B-SGR-M-PG21	
M25	G16B-SGR-M-M25	

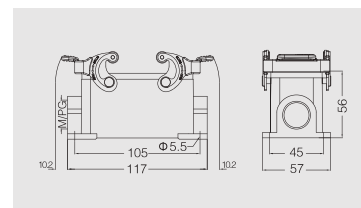

G16B耐腐蚀外壳 Metal Hoods & Housings For higher environmental requirements



底部外壳安装开孔尺寸/Housing mounting dimensionsPAGE/390

表面粉末镀层, RAL 9005 / Powder-coated,RAL 9005


防护等级 Degree of protection : IP65

下壳底座 / Housings

封底下壳高结构
Housings, surface mounting, high construction




螺纹 Thread	型号/Type	订货号 /Part Number
2PG29	G16B-SGRH-M-2PG29	
2M32	G16B-SGRH-M-2M32	
2M40	G16B-SGRH-M-2M40	

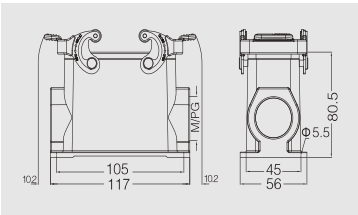

电缆对接下壳 Cable-to-cable hood




螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G16B-TBF-M-PG21	

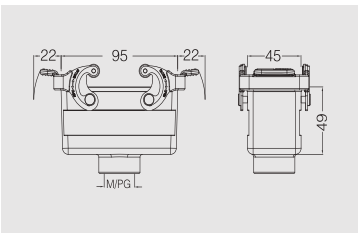

底座保护盖 Housing protection cover




螺纹 Thread	型号/Type	订货号 /Part Number
	金属盖/用于上壳 For hoods	
	G16B-KDB-LA-M-1	
	金属盖/用于下壳 For housings	
	G16B-KDB-LA-M-2	

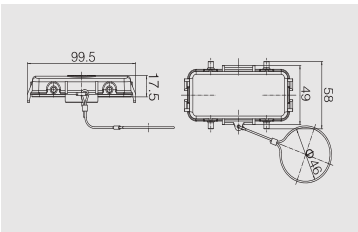

上壳保护盖 Protection covers for hoods



螺纹 Thread	型号/Type	订货号 /Part Number
	金属盖/用于上壳 For hoods	
	G16B-KDT-LA-M-1	
	金属盖/用于下壳 For housings	
	G16B-KDT-LA-M-2	

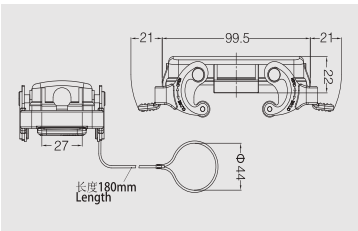

GE-024接插体 /GE-024 inserts



芯件适配用G24B外壳

Inserts suit for G24B hoods/housing

24+

螺钉压接/Screw terminal



500V max.16A

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-024-M	
母 Female	GE-024-F	


弹片压接/Spring terminal



500V max.16A

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-024-MS	
母 Female	GE-024-FS	

冷压针压接/Crimp terminal



500V max.16A

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-024-MC	
母 Female	GE-024-FC	



冷压接插针 Crimp contacts

技术参数/Technical data

材料: 铜

Material: copper

接触电阻/Contact resistance: $\leq 1\text{m}\Omega$

接线形式: 冷压工具压接

Terminal: crimp connection



工具 Tools

冷压钳 Manual hydraulic clamp



退针器 Removal tool



(镀银)冷压接插针/Crimp contacts.silver-platea

标识 Identification	线规 Wire gauge	剥线长度 Stripping length	公插针 Male	订货号 Part Number	母插针 Female	订货号 Part Number	内孔 直径
no groove	0.5 mm ²	AWG 20	75mm	CEM-0.5	CEF-0.5		1.15
1 groove	0.75 mm ²	AWG 18	75mm	CEM-0.75	CEF-0.75		1.3
1 groove	1.0 mm ²	AWG 18	75mm	CEM-1.0	CEF-1.0		1.45
2 groove	1.5 mm ²	AWG 16	75mm	CEM-1.5	CEF-1.5		1.75
3 groove	2.5 mm ²	AWG 14	75mm	CEM-2.5	CEF-2.5		2.25
wide groove	3.0 mm ²	AWG 12	75mm	CEM-3.0	CEF-3.0		2.55
no groove	4.0 mm ²	AWG 12	75mm	CEM-4.0	CEF-4.0		2.85

(镀金)冷压接插针/Crimp contacts.Gold-plated


标识 Identification	线规 Wire gauge	剥线长度 Stripping length	公插针 Male	订货号 Part Number	母插针 Female	订货号 Part Number	内孔 直径
no groove	0.5 mm ²	AWG 20	75mm	DEM-0.5	DEF-0.5		1.15
1 groove	0.75 mm ²	AWG 18	75mm	DEM-0.75	DEF-0.75		1.3
1 groove	1.0 mm ²	AWG 18	75mm	DEM-1.0	DEF-1.0		1.45
2 groove	1.5 mm ²	AWG 16	75mm	DEM-1.5	DEF-1.5		1.75
3 groove	2.5 mm ²	AWG 14	75mm	DEM-2.5	DEF-2.5		2.25
wide groove	3.0 mm ²	AWG 12	75mm	DEM-3.0	DEF-3.0		2.55
no groove	4.0 mm ²	AWG 12	75mm	DEM-4.0	DEF-4.0		2.85

压接线经 Wire gauge	型号/Type	订货号/Part Number
0.5-4mm ²	CRIMPBOX-0.5/4	

适用类型 For	型号/Type	订货号/Part Number
16A 冷压针 Crimp contacts	REMOV-GEE	

1) 接插体之间的最大距离21mm


1) Distance for contact max.21mm



	a	b	e	g	c	d	f	m
M/F	17	32.5	111	34	17	34.8	111.5	34
MS/FS	18.5	33.6	111	34	18.5	36	111.5	34
MZ/FZ	17.4	34.5	111	34	17.2	36.7	111.5	34



接插针排序

Contacts arrangement view from termination side




面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



M



F

G24B 双扣外壳 /G24B with 2 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037

防护等级 Degree of protection : IP65

上壳 / Hoods


侧面进线 Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G24B-TS-PG21	
M25	G24B-TS-M25	
M32	G24B-TS-M32	

高结构/High construction

PG21	G24B-TSH-PG21	
PG29	G24B-TSH-PG29	
M25	G24B-TSH-M25	
M32	G24B-TSH-M32	
M40	G24B-TSH-M40	



高结构/High construction



顶部进线 Top entry



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G24B-TG-PG21	
M25	G24B-TG-M25	
M32	G24B-TG-M32	

高结构/High construction

PG21	G24B-TGH-PG21	
PG29	G24B-TGH-PG29	
M25	G24B-TGH-M25	
M32	G24B-TGH-M32	
M40	G24B-TGH-M40	



高结构/High construction

上壳侧出线/顶出线
Hoods, side & top entry, high construction

我司可提供顶部、侧面同时出线的非标品
We can provide non-standard products with both top & side entry

型号为: G24B-TSH/TGH-PG/M 如有需要请与我司联系



上壳保护盖 Protection covers for hoods



螺纹 Thread	型号/Type	订货号 /Part Number
	G24B-KDT	

带金属保护盖/With protection cover

金属盖/用于上壳 For hoods





G24B-KDT-LA-1

金属盖/用于下壳 For housings




G24B-KDT-LA-2



下壳底座 / Housings

外壳底座开孔安装
Bulkhead mounted

螺纹 Thread	型号/Type	订货号 /Part Number
	G24B-AG	



G24B 双扣外壳 /G24B with 2 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390


表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037

防护等级 Degree of protection : IP65

下壳底座 / Housings

外壳底座: 表面安装
Surface mounted: Side entry


螺纹 Thread	型号/Type	订货号 /Part Number
1个进线孔 1 side entry		
PG21	G24B-SGR-PG21	
M25	G24B-SGR-M25	
2个进线孔 2 side entry		
PG21	G24B-SGR-2PG21	
M25	G24B-SGR-2M25	
高结构/High construction		
PG21	G24B-SGRH-PG21	
PG29	G24B-SGRH-PG29	
M32	G24B-SGRH-M32	
M40	G24B-SGRH-M40	
2个进线孔 2 side entry		
PG21	G24B-SGRH-2PG21	
PG29	G24B-SGRH-2PG29	
M32	G24B-SGRH-2M32	
M40	G24B-SGRH-2M40	

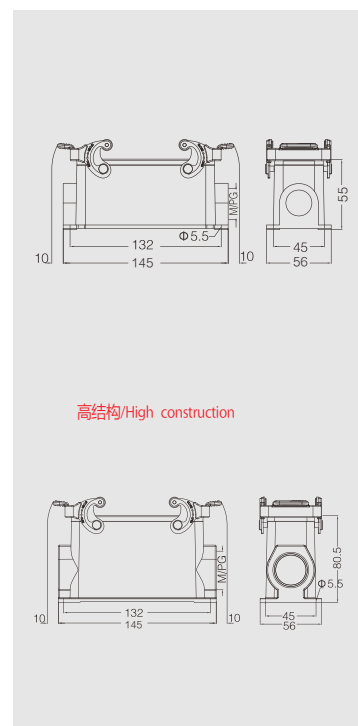


电缆对接下壳 Cable-to-cable hood



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G24B-TBF-PG21	
M25	G24B-TBF-M25	
M32	G24B-TBF-M32	
高结构/High construction		
PG21	G24B-TBFH-PG21	
PG29	G24B-TBFH-PG29	
M32	G24B-TBFH-M32	
M40	G24B-TBFH-M40	

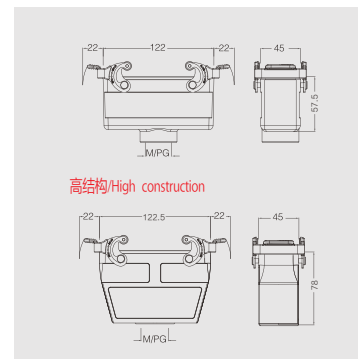底座保护盖
Housing protection cover

螺纹 Thread	型号/Type	订货号 /Part Number
	G24B-KDB	
金属保护盖 / With protection cover		
---	金属盖/用于上壳 For hoods	
	G24B-KDB-LA-1	
金属盖/用于下壳 For housings		
	G24B-KDB-LA-2	

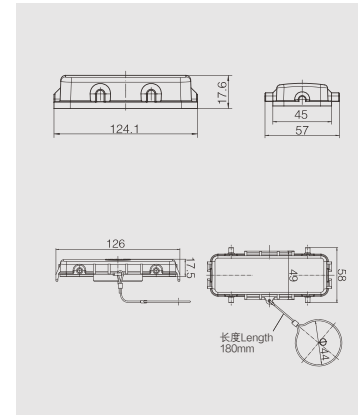

G24B 双扣外壳 /G24B with 2 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037

防护等级 Degree of protection : IP65


上壳 / Hoods

侧出带双扣下壳

Side entry housing with two levers



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G24B-TSB-PG21	
M25	G24B-TSB-M25	
M32	G24B-TSB-M32	
高结构/High construction		
PG21	G24B-TSBH-PG21	
PG29	G24B-TSBH-PG29	
M25	G24B-TSBH-M25	
M32	G24B-TSBH-M32	
M40	G24B-TSBH-M40	

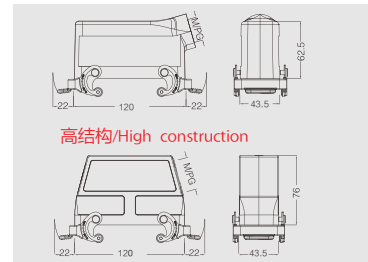


顶出带双扣下壳

Top entry housing with two levers



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G24B-TGB-PG21	
M25	G24B-TGB-M25	
M32	G24B-TGB-M32	
高结构/High construction		
PG21	G24B-TGBH-PG21	
PG29	G24B-TGBH-PG29	
M25	G24B-TGBH-M25	
M32	G24B-TGBH-M32	
M40	G24B-TGBH-M40	

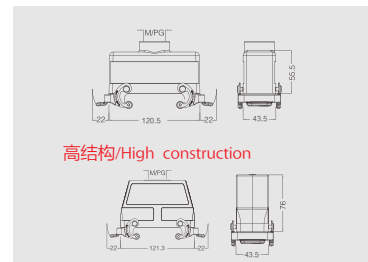


双扣带盖开孔底座

Bulkhead mounting with hoods



螺纹 Thread	型号/Type	订货号 /Part Number
	G24B-AG-BO	
带保护盖/with protection cover		
	G24B-AD-BO	
带金属保护盖/with protection cover		
	G24B-AD-LA-BO	

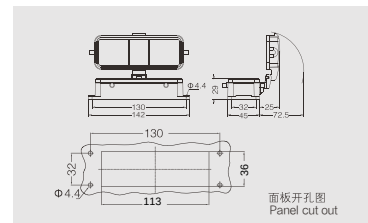


下壳底座 / Housings

双扣带盖表面安装底座

Surface mounting with hoods



螺纹 Thread	型号/Type	订货号 /Part Number
带保护盖/with protection cover		
1个进线孔 1 side entry		
PG21	G24B-SDR-BO-PG21	
M25	G24B-SDR-BO-M25	
2个进线孔 2 side entry		
PG21	G24B-SDR-BO-2PG21	
M25	G24B-SDR-BO-2M25	
高结构/High construction		
1个进线孔 1 side entry		
PG21	G24B-SDRH-BO-PG21	
PG29	G24B-SDRH-BO-PG29	
M32	G24B-SDRH-BO-M32	
M40	G24B-SDRH-BO-M40	
2个进线孔 2 side entry		
PG21	G24B-SDRH-BO-2PG21	
PG29	G24B-SDRH-BO-2PG29	
M32	G24B-SDRH-BO-2M32	
M40	G24B-SDRH-BO-2M40	

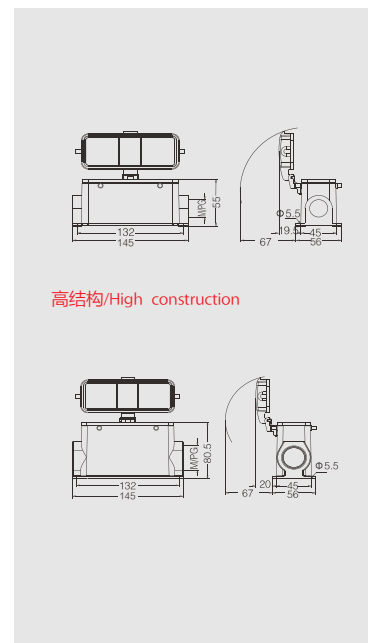

G24B单扣外壳 /G24B with 1 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037


防护等级 Degree of protection : IP65

上壳 / Hoods

侧面进线 Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G24B-TS-RO-PG21	
M25	G24B-TS-RO-M25	
M32	G24B-TS-RO-M32	
高结构/High construction		
PG21	G24B-TSH-RO-PG21	
PG29	G24B-TSH-RO-PG29	
M25	G24B-TSH-RO-M25	
M32	G24B-TSH-RO-M32	
M40	G24B-TSH-RO-M40	

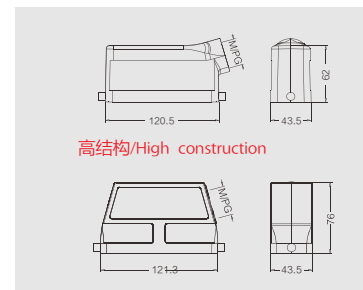

顶部进线 Top entry



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G24B-TG-RO-PG21	
PG29	G24B-TG-RO-PG29	
M25	G24B-TG-RO-M25	
M32	G24B-TG-RO-M32	
高结构/High construction		
PG21	G24B-TGH-RO-PG21	
PG29	G24B-TGH-RO-PG29	
PG36	G24B-TGH-RO-PG36	
M25	G24B-TGH-RO-M25	
M32	G24B-TGH-RO-M32	
M40	G24B-TGH-RO-M40	

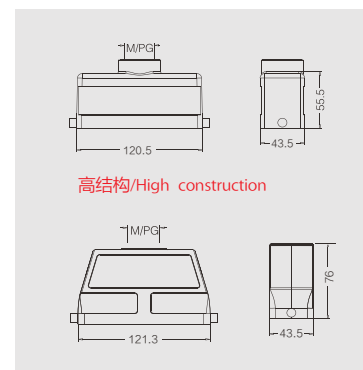


下壳底座 / Housings


外壳底座: 开孔安装 Bulkhead mounted



螺纹 Thread	型号/Type	订货号 /Part Number
	G24B-AG-LB	
带保护盖/ith protection cover		
	G24B-AD-LB	
上壳保护盖/protection cover		
	G24B-KDT-LB	

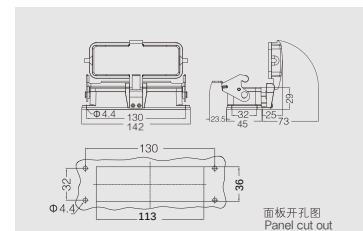外壳底座: 表面安装
Surface mounted: Side entry

螺纹 Thread	型号/Type	订货号 /Part Number
1个进线孔1 side entry		
PG21	G24B-SGR-LB-PG21	
M25	G24B-SGR-LB-M25	
2个进线孔2 side entry		
2PG21	G24B-SGR-LB-2PG21	
2M25	G24B-SGR-LB-2M25	
高结构 / High construction		
1个进线孔1 side entry		
PG21	G24B-SGRH-LB-PG21	
PG29	G24B-SGRH-LB-PG29	
M32	G24B-SGRH-LB-M32	
M40	G24B-SGRH-LB-M40	
2个进线孔2 side entry		
PG21	G24B-SGRH-LB-2PG21	
PG29	G24B-SGRH-LB-2PG29	
M32	G24B-SGRH-LB-2M32	
M40	G24B-SGRH-LB-2M40	

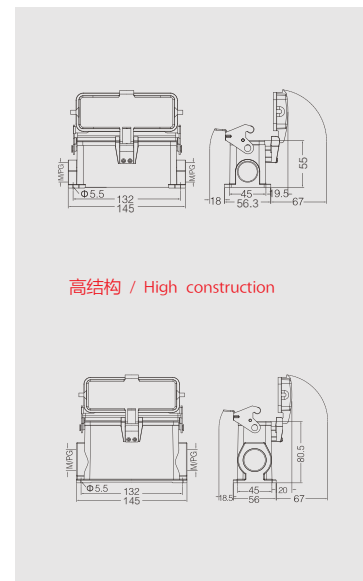

G24B单扣外壳 /G24B with 1 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037

防护等级 Degree of protection : IP65


下壳底座 / Housings

带盖表面安装底座 Surface mounting




螺纹 Thread	型号/Type	订货号 /Part Number
带保护盖/With protection cover		
1个进线孔1 side entry		
PG21	G24B-SDR-LB-PG21	
M25	G24B-SDR-LB-M25	
2个进线孔2 side entry		
2PG21	G24B-SDR-LB-2PG21	
2M25	G24B-SDR-LB-2M25	
高结构 / High construction		
1个进线孔1 side entry		
PG21	G24B-SDRH-LB-PG21	
PG29	G24B-SDRH-LB-PG29	
M32	G24B-SDRH-LB-M32	
2个进线孔2 side entry		
PG21	G24B-SDRH-LB-2PG21	
PG29	G24B-SDRH-LB-2PG29	
M32	G24B-SDRH-LB-2M32	
带金属保护盖/With metal protective cover		
1个进线孔1 side entry		
PG21	G24B-SDR-LB-LA-PG21	
M25	G24B-SDR-LB-LA-M25	
2个进线孔2 side entry		
2PG21	G24B-SDR-LB-LA-2PG21	
2M25	G24B-SDR-LB-LA-2M25	
高结构 / High construction		
1个进线孔1 side entry		
PG21	G24B-SDRH-LB-LA-PG21	
PG29	G24B-SDRH-LB-LA-PG29	
M32	G24B-SDRH-LB-LA-M32	
2个进线孔2 side entry		
PG21	G24B-SDRH-LB-LA-2PG21	
PG29	G24B-SDRH-LB-LA-2PG29	
M32	G24B-SDRH-LB-LA-2M32	

带保护盖/With protection cover

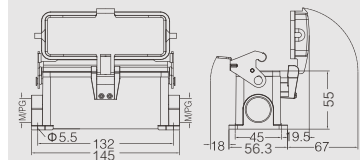


高结构 / High construction

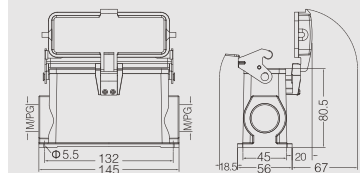


电缆对接下壳 Cable-to-cable hood



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G24B-TBF-LB-PG21	
PG29	G24B-TBF-LB-PG29	
M25	G24B-TBF-LB-M25	
M32	G24B-TBF-LB-M32	
高结构 / High construction		
PG21	G24B-TBFH-LB-PG21	
PG29	G24B-TBFH-LB-PG29	
M32	G24B-TBFH-LB-M32	
M40	G24B-TBFH-LB-M40	



高结构 / High construction



G24B 耐腐蚀外壳 Metal Hoods & Housings For higher environmental requirements



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 9005 / Powder-coated, RAL 9005


防护等级 Degree of protection : IP65

上壳 / Hoods


侧出线 side entry



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G24B-TS-M-PG21	
M25	G24B-TS-M-M25	

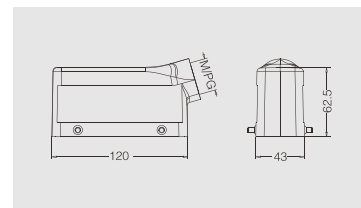侧出线高结构
side entry, high construction


螺纹 Thread	型号/Type	订货号 /Part Number
高结构 / High construction		
PG29	G24B-TSH-M-PG29	
M32	G24B-TSH-M-M32	
M40	G24B-TSH-M-M40	

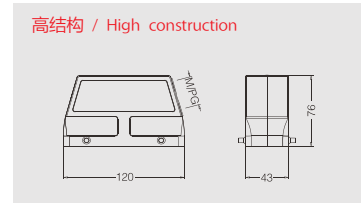


顶出线 top entry



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G24B-TG-M-PG21	
M25	G24B-TG-M-M25	

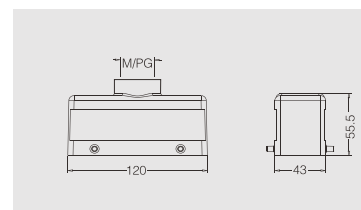顶出线高结构
top entry, high construction


螺纹 Thread	型号/Type	订货号 /Part Number
高结构 / High construction		
PG29	G24B-TGH-M-PG29	
M32	G24B-TGH-M-M32	

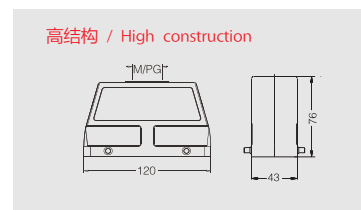

下壳底座 / Housings

不封底下壳
Housings, bulkhead mounting


螺纹 Thread	型号/Type	订货号 /Part Number
---	G24B-AG-M	

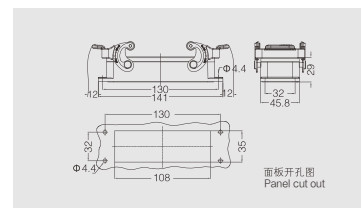

封底下壳 Housings, surface mounting



螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G24B-SGR-M-PG21	
M25	G24B-SGR-M-M25	

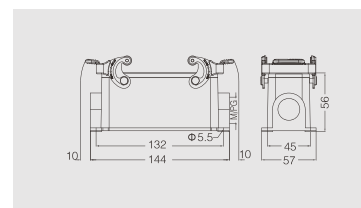



底部外壳安装开孔尺寸/Housing mounting dimensionsPAGE/390

表面粉末镀层, RAL 9005 / Powder-coated,RAL 9005

防护等级 Degree of protection : IP65


下壳底座 / Housings

封底下壳高结构

Housings, surface mounting, high construction




螺纹 Thread	型号/Type	订货号 /Part Number
2PG29	G24B-SGRH-M-2PG29	
2M32	G24B-SGRH-M-2M32	
2M40	G24B-SGRH-M-2M40	

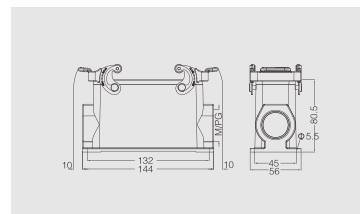

电缆对接下壳 Cable-to-cable hood




螺纹 Thread	型号/Type	订货号 /Part Number
PG21	G24B-TBF-M-PG21	

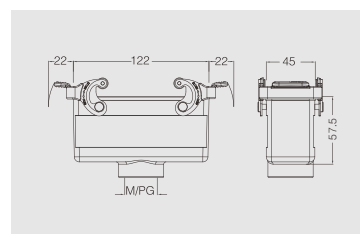

底座保护盖 Housing protection cover




螺纹 Thread	型号/Type	订货号/Part Number
	金属盖/用于上壳 For hoods	
	金属盖/用于下壳 For housings	

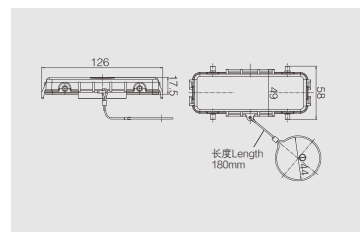

上壳保护盖 Protection covers for hoods



螺纹 Thread	型号/Type	订货号 /Part Number
	金属盖/用于上壳 For hoods	
	金属盖/用于下壳 For housings	

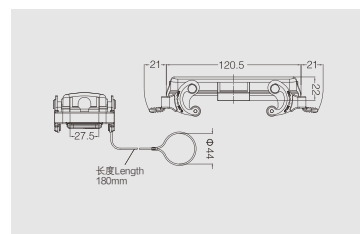

GE-032接插体 / GE-032 inserts



芯件适配用G32B外壳

Inserts suit for G32B hoods/housing

32+ (16X2)

螺钉压接/Screw terminal



500V max.16A(16x2)

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-016-M(1-16)	
母 Female	GE-016-F(1-16)	
公 Male	GE-016-M(16-32)	
母 Female	GE-016-F(17-32)	

弹片压接/Spring terminal



500V max.16A(16x2)

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-016-MS(1-16)	
母 Female	GE-016-FS(1-16)	
公 Male	GE-016-MS(17-32)	
母 Female	GE-016-FS(17-32)	

冷压针压接/Crimp terminal



500V max.16A(16x2)

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-016-MC(1-16)	
母 Female	GE-016-FC(1-16)	
公 Male	GE-016-MC(17-32)	
母 Female	GE-016-FC(17-32)	



冷压接插针 Crimp contacts

技术参数/Technical data

材料: 铜

Material: copper

接触电阻/Contact resistance: $\leq 1\text{m}\Omega$

接线形式: 冷压工具压接

Terminal: crimp connection



工具 Tools

冷压钳 Manual hydraulic clamp



退针器 Removal tool



(镀银)冷压接插针/Crimp contacts.silver-platea

标识 Identification	线规 Wire gauge	剥线长度 Stripping length	公插针 Male	订货号 Part Number	母插针 Female	订货号 Part Number	内孔 直径
no groove	0.5 mm ²	7.5m m	CEM-0.5		CEF-0.5		1.15
1 groove	0.75 mm ²	7.5m m	CEM-0.75		CEF-0.75		1.3
1 groove	1.0 mm ²	7.5m m	CEM-1.0		CEF-1.0		1.45
2 groove	1.5 mm ²	7.5m m	CEM-1.5		CEF-1.5		1.75
3 groove	2.5 mm ²	7.5m m	CEM-2.5		CEF-2.5		2.25
wide groove	3.0 mm ²	7.5m m	CEM-3.0		CEF-3.0		2.55
no groove	4.0 mm ²	7.5m m	CEM-4.0		CEF-4.0		2.85

(镀金)冷压接插针/Crimp contacts.Gold-plated

标识 Identification	线规 Wire gauge	剥线长度 Stripping length	公插针 Male	订货号 Part Number	母插针 Female	订货号 Part Number	内孔 直径
no groove	0.5 mm ²	7.5m m	DEM-0.5		DEF-0.5		1.15
1 groove	0.75 mm ²	7.5m m	DEM-0.75		DEF-0.75		1.3
1 groove	1.0 mm ²	7.5m m	DEM-1.0		DEF-1.0		1.45
2 groove	1.5 mm ²	7.5m m	DEM-1.5		DEF-1.5		1.75
3 groove	2.5 mm ²	7.5m m	DEM-2.5		DEF-2.5		2.25
wide groove	3.0 mm ²	7.5m m	DEM-3.0		DEF-3.0		2.55
no groove	4.0 mm ²	7.5m m	DEM-4.0		DEF-4.0		2.85

压接线经

Wire gauge
0.5-4mm²

型号/Type

CRIMPBOX-0.5/4

订货号/Part Number

适用类型 For

型号/Type


16A 冷压针
Crimp contacts

REMOV-GEE

订货号/Part Number

1) 接插体之间的最大距离21mm


1) Distance for contact max.21mm



	a	b	e	g	c	d	f	m
M/F	17	32.5	84.2	34	17	34.8	84.5	34
MS/FS	18	33.7	84.5	34	18.2	35.5	84.5	34
MZ/FZ	17.4	34.5	84.5	34	17.2	36.8	84.5	34



接插针排序

Contacts arrangement view from termination side




面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



M



F

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037

上売 / Hoods



Technical drawing of the 1000mm x 1000mm x 100mm table top. The drawing includes two views: a side view on the left and a top view on the right. The side view shows a rectangular table top with a central cutout. Dimensions include a height of 89, a central cutout width of 55, a central cutout height of 112, and a total width of 124.3. The top view shows a square table top with a central circular cutout. Dimensions include a side length of 67 and a total side length of 86.



Technical drawing of the M/PG container showing front and side views with dimensions:

- Front view dimensions:
 - Top width: 94
 - Top depth: 19
 - Height: 96
 - Bottom width: 82.5
 - Label: M/PG
- Side view: Shows the profile of the container with a depth of 19.

G32B带双扣外壳/G32B with 2 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037


注:上壳高结构和低结构是通用型结构

上壳 / Hoods

外壳上壳: 侧面进线 Hood: Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG29	G32B-TSB-PG29	
M32	G32B-TSB-M32	

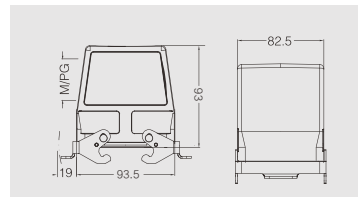

开孔安装 Bulkhead mounted




螺纹 Thread	型号/Type	订货号 /Part Number
PG29	G32B-TGB-PG29	
PG36	G32B-TGB-PG36	
PG42	G32B-TGB-PG42	
M32	G32B-TGB-M32	
M40	G32B-TGB-M40	
M50	G32B-TGB-M50	

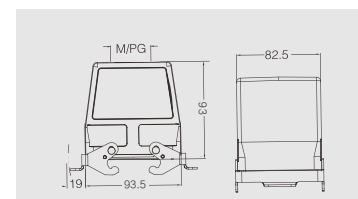

开孔安装 Bulkhead mounted




螺纹 Thread	型号/Type	订货号 /Part Number
	G32B-AG-BO	

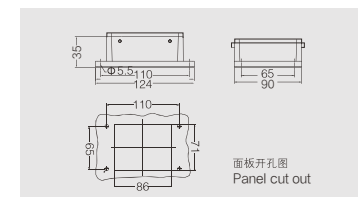

开孔安装 Bulkhead mounted




螺纹 Thread	型号/Type	订货号 /Part Number
1个进线孔1 side entry		
PG29	G32B-SGR-BO-PG29	
PG36	G32B-SGR-BO-PG36	
PG42	G32B-SGR-BO-PG42	
M32	G32B-SGR-BO-M32	
M40	G32B-SGR-BO-M40	
2个进线孔2 side entry		
PG29	G32B-SGR-BO-2PG29	
PG36	G32B-SGR-BO-2PG36	
PG42	G32B-SGR-BO-2PG42	
M32	G32B-SGR-BO-2M32	
M40	G32B-SGR-BO-2M40	

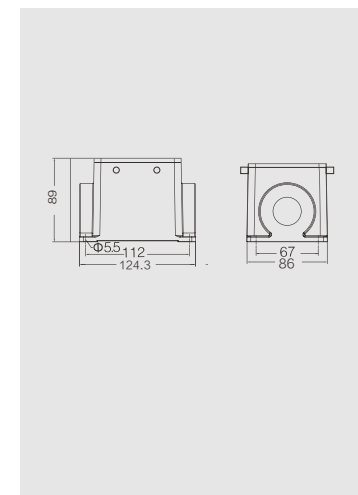

底座保护盖



螺纹 Thread	型号/Type	订货号 /Part Number
	G32B-KDB-LA-2	

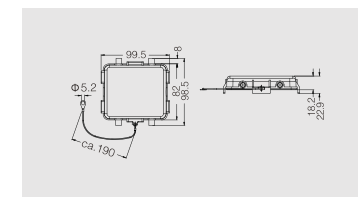

G32B带单扣外壳 / G32B with 1 lever on the hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037


注:上壳高结构和低结构是通用型结构

上壳 / Hoods


外壳上壳: 侧面进线 Hood: Side entry



螺纹 Thread	型号/Type	订货号 /Part Number
PG29	G32B-TS-RO-PG29	
PG36	G32B-TS-RO-PG36	
PG42	G32B-TS-RO-PG42	
M32	G32B-TS-RO-M32	
M40	G32B-TS-RO-M40	
M50	G32B-TS-RO-M50	

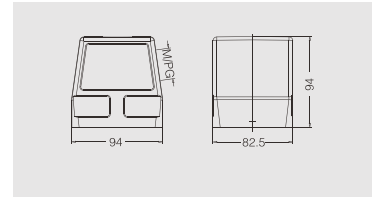外壳上壳: 顶部进线
Hood: Top entry


螺纹 Thread	型号/Type	订货号 /Part Number
PG29	G32B-TG-RO-PG29	
PG36	G32B-TG-RO-PG36	
PG42	G32B-TG-RO-PG42	
M32	G32B-TG-RO-M32	
M40	G32B-TG-RO-M40	
M50	G32B-TG-RO-M50	

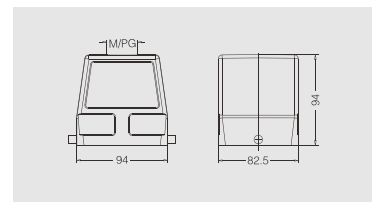


下壳底座 / Housings

外壳底座: 开孔安装
Bulkhead mounted: Bottom entry

螺纹 Thread	型号/Type	订货号 /Part Number
	G32B-AG-LB	
	带保护盖/With protection cover	
	G32B-AD-LB	

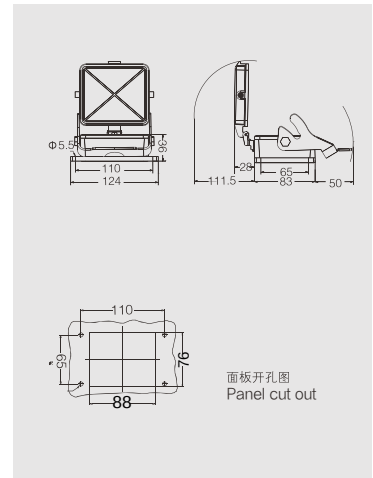外壳底座: 表面安装
Surface mounted: Side entry

螺纹 Thread	型号/Type	订货号 /Part Number
1个进线孔1 side entry		
PG29	G32B-SGR-LB-PG29	
M32	G32B-SGR-LB-M32	
2个进线孔2 side entry		
PG29	G32B-SGR-LB-2PG29	
M32	G32B-SGR-LB-2M32	
	带保护盖/With protection cover	
1个进线孔1 side entry		
PG29	G32B-SDR-LB-PG29	
M32	G32B-SDR-LB-M32	
2个进线孔2 side entry		
PG29	G32B-SDR-LB-2PG29	
M32	G32B-SDR-LB-2M32	

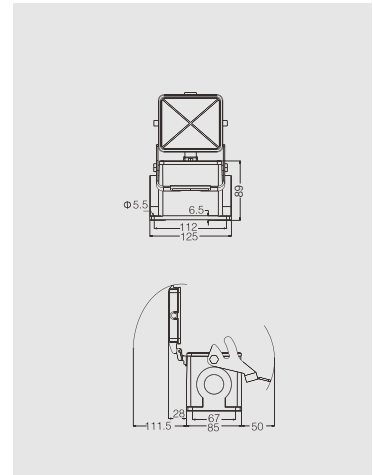

GE-048接插体 / GE-048 inserts



芯件适配用G48B外壳

Inserts suit for G48B hoods/housing

48+ (24X2)

螺钉压接/Screw terminal



500V max.16A(24x2)

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-024-M(1-24)	
母 Female	GE-024-F(1-24)	
公 Male	GE-024-M(25-48)	
母 Female	GE-016-F(25-48)	

弹片压接/Spring terminal



500V max.16A(24x2)

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-024-MS(1-24)	
母 Female	GE-024-FS(1-24)	
公 Male	GE-024-MS(25-48)	
母 Female	GE-024-FS(25-48)	

冷压针压接/Crimp terminal



500V max.16A

插芯/Inserts	型号/Type	订货号/Part Number
公 Male	GE-024-MC(1-24)	
母 Female	GE-024-FC(1-24)	
公 Male	GE-024-MC(25-48)	
母 Female	GE-024-FC(25-48)	



冷压接插针 Crimp contacts

技术参数/Technical data

材料: 铜

Material: copper

接触电阻/Contact resistance: $\leq 1\text{m}\Omega$

接线形式: 冷压工具压接

Terminal: crimp connection



工具 Tools

冷压钳 Manual hydraulic clamp



退针器 Removal tool



(镀银)冷压接插针/Crimp contacts.silver-platea

标识 Identification	线规 Wire gauge	剥线长度 Stripping length	公插针 Male	订货号 Part Number	母插针 Female	订货号 Part Number	内孔 直径
no groove	0.5 mm ²	AWG 20	7.5m m	CEM-0.5	CEF-0.5		1.15
1 groove	0.75 mm ²	AWG 18	7.5m m	CEM-0.75	CEF-0.75		1.3
1 groove	1.0 mm ²	AWG 18	7.5m m	CEM-1.0	CEF-1.0		1.45
2 groove	1.5 mm ²	AWG 16	7.5m m	CEM-1.5	CEF-1.5		1.75
3 groove	2.5 mm ²	AWG 14	7.5m m	CEM-2.5	CEF-2.5		2.25
wide groove	3.0 mm ²	AWG 12	7.5m m	CEM-3.0	CEF-3.0		2.55
no groove	4.0 mm ²	AWG 12	7.5m m	CEM-4.0	CEF-4.0		2.85

(镀金)冷压接插针/Crimp contacts.Gold-plated

标识 Identification	线规 Wire gauge	剥线长度 Stripping length	公插针 Male	订货号 Part Number	母插针 Female	订货号 Part Number	内孔 直径
no groove	0.5 mm ²	AWG 20	7.5m m	DEM-0.5	DEF-0.5		1.15
1 groove	0.75 mm ²	AWG 18	7.5m m	DEM-0.75	DEF-0.75		1.3
1 groove	1.0 mm ²	AWG 18	7.5m m	DEM-1.0	DEF-1.0		1.45
2 groove	1.5 mm ²	AWG 16	7.5m m	DEM-1.5	DEF-1.5		1.75
3 groove	2.5 mm ²	AWG 14	7.5m m	DEM-2.5	DEF-2.5		2.25
wide groove	3.0 mm ²	AWG 12	7.5m m	DEM-3.0	DEF-3.0		2.55
no groove	4.0 mm ²	AWG 12	7.5m m	DEM-4.0	DEF-4.0		2.85

压接线经

Wire gauge
0.5-4mm²

型号/Type

CRIMPBOX-0.5/4


订货号/Part Number

适用类型 For
16A 冷压针
Crimp contacts型号/Type
REMOV-GEE

订货号/Part Number

1) 接插体之间的最大距离21mm


1) Distance for contact max.21mm



	a	b	e	g	c	d	f	m
M/F	17	32.5	111	34	17	34.8	111.5	34
MS/FS	18.5	33.6	111	34	18.5	36	111.5	34
MZ/FZ	17.4	34.5	111	34	17.2	36.7	111.5	34



接插针排序

Contacts arrangement view from termination side




面板安装开孔图

Panel cut out for inserts for use without Hoods/housings



M



F

G48B外壳 / G48B hoods/housings



底部外壳安装开孔尺寸/Housing mounting dimensions PAGE/390

表面粉末镀层, RAL 7037 / Powder-coated, RAL 7037


防护等级 Degree of protection : IP65

上壳 / Hoods

侧面进线 Hood: Side entry




螺纹 Thread	型号/Type	订货号 /Part Number
PG29	G48B-TS-RO-PG29	
PG36	G48B-TS-RO-PG36	
PG42	G48B-TS-RO-PG42	
M32	G48B-TS-RO-M32	
M40	G48B-TS-RO-M40	
M50	G48B-TS-RO-M50	

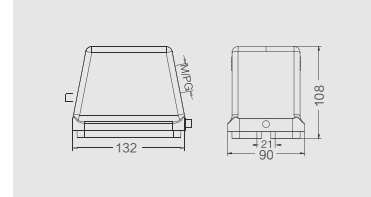

外壳上壳: 顶部进线 Hood: Top entry



螺纹 Thread	型号/Type	订货号 /Part Number
PG29	G48B-TG-RO-PG29	
PG36	G48B-TG-RO-PG36	
PG42	G48B-TG-RO-PG42	
M32	G48B-TG-RO-M32	
M40	G48B-TG-RO-M40	
M50	G48B-TG-RO-M50	

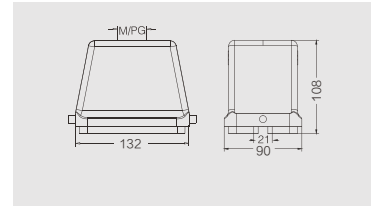


下壳底座 / Housings

外壳底座: 开孔安装

Bulkhead mounted: Bottom entry



螺纹 Thread	型号/Type	订货号 /Part Number
	G48B-AG-LB	
	带保护盖/With protection cover	
	G48B-AD-LB	

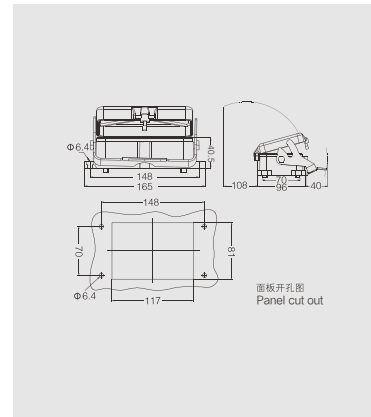

外壳底座: 表面安装

Surface mounted: Side entry



螺纹 Thread	型号/Type	订货号 /Part Number
1个进线孔1 side entry		
PG29	G48B-SGR-LB-PG29	
PG36	G48B-SGR-LB-PG36	
M32	G48B-SGR-LB-M32	
M40	G48B-SGR-LB-M40	
2个进线孔2 side entry		
PG29	G48B-SGR-LB-2PG29	
PG36	G48B-SGR-LB-2PG36	
M32	G48B-SGR-LB-2M32	
M40	G48B-SGR-LB-2M40	
	带保护盖/With protection cover	
1个进线孔1 side entry		
PG29	G48B-SDR-LB-PG29	
PG36	G48B-SDR-LB-PG36	
M32	G48B-SDR-LB-M32	
M40	G48B-SDR-LB-M40	
2个进线孔2 side entry		
PG29	G48B-SDR-LB-2PG29	
PG36	G48B-SDR-LB-2PG36	
M32	G48B-SDR-LB-2M32	
M40	G48B-SDR-LB-2M40	

